

COXMATE 6W SPEAKER HARNESS SYSTEMS

Description	Coxmate Part	NK equivalent
Lead Section with seat sensor connection	F+	A+
Lead section without seat sensor connection	F	A
Y Extension	Y	M
Speaker	SP	Speaker
Seat sensor	SS	R

F+	
F	
Y	
SP	
SS	

F+



F



SP



Y




SS



Harness/Speaker Configurations


Four harness with 2 speakers



Comprises:

1 x F
1 x Y
2 x SP

Four harness with 2 speakers and seat sensor



Comprises:

1 x F+
1 x Y
1 x SS
2 x SP


Eight harness with 3 speakers



Comprises:

1 x F
2 x Y
3 x SP


Eight harness with 3 speakers and seat sensor



Comprises:

1 x F+
2 x Y
1 x SS
3 x SP


Eight harness with 4 speakers



Comprises:

1 x F
3 x Y
4 x SP

Eight harness with 4 speakers and seat sensor



Comprises:

1 x F+
3 x Y
1 x SS
4 x SP

* Depending on boat being stern or bow coxed

Package Contents:

F+

- 1 x F+ Harness
- 4 x Self- adhesive Velcro cable straps
- 1 x Alcohol swab

F

- 1 x F Harness
- 3 x Self- adhesive Velcro cable straps
- 1 x alcohol swab

Y

- 1 x Y Harness
- 3 x Self- adhesive Velcro cable straps
- 1 x alcohol swab


SP

- 1 x Speaker with lead
- 1 x Self-adhesive Velcro mounting disc
- 1 x Self- adhesive Velcro cable straps
- 1 x alcohol swab

SS

- 1 x Sensor with lead
- 2 x Self-adhesive Velcro cable straps
- 1 x Adjustable spacer bracket
- 1 x alcohol swab
- 3 x Double sided tape (~30x20mm)
- 2 x SS screw/nut/washer
- 2 x SS self tapping screws

Schematic of seat sensor mounting with reed switch (pick up) under deck

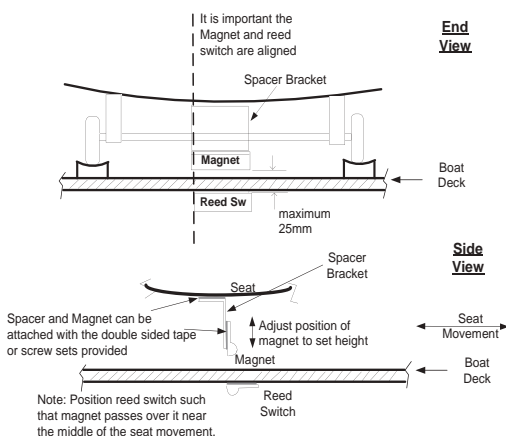

Preparing surfaces before applying double sided tape or self-adhesive Velcro:

1. Remove any surface dirt/grime and clean with alcohol swab.
2. Dry with clean rag or tissue.
3. Lightly abrade surface with Scotchbrite® or, fine wet and dry paper.
4. Remove any dust with clean tissue or rag.
5. Apply double sided tape or self - adhesive Velcro. Avoid applying heavy load until tape has had ~12 hours to 'set'.